SCALE : NTS

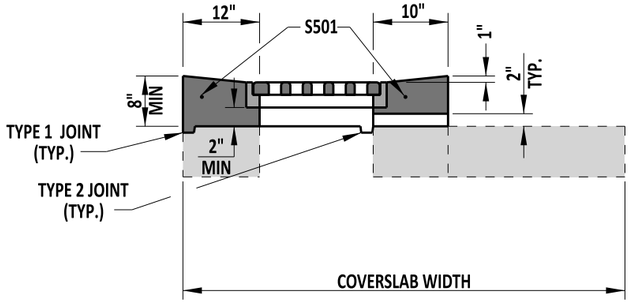

TYPE A

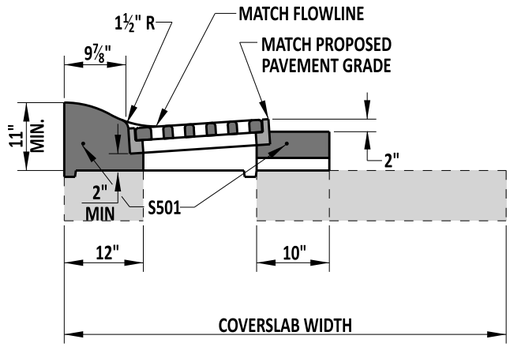

TYPE D

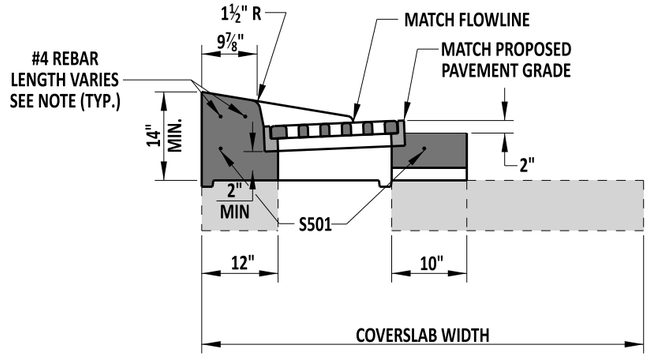

TYPE E

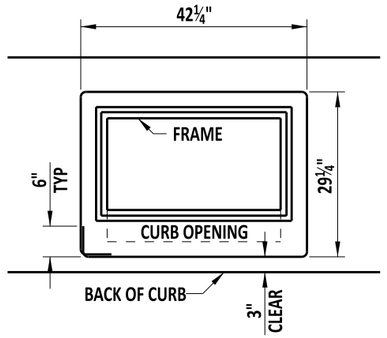

S501 BENDING DIAGRAM

#5 REBAR TO BE CONTINUOUS OR WITH 12" OVERLAP BETWEEN BARS.

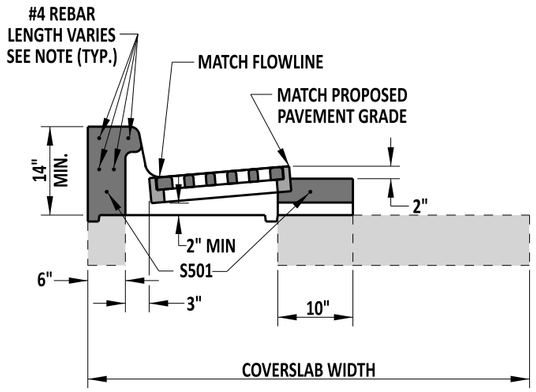

TYPE B

SEE CURB OPENING DETAIL ON THIS SHEET



CURB OPENING DETAIL

INLET TOP UNIT APPLICATIONS	
TOP UNIT	CURB
TYPE A	USE IN NON CURBED
TYPE B	INTEGRAL PCC CURB & GUTTER, TYPE 1-8 & 3-8, PCC CURB TYPE 1-8
TYPE C	INTEGRAL PCC CURB & GUTTER, TYPES 1-6, 3-6, 1-4, 3-4 , 1-2 AND 3-2 AND PCC CURB TYPE 1-6, 1-4, AND 1-2.
TYPE D	INTEGRAL PCC CURB & GUTTER, TYPE 2
TYPE E	PCC CURB TYPE 2

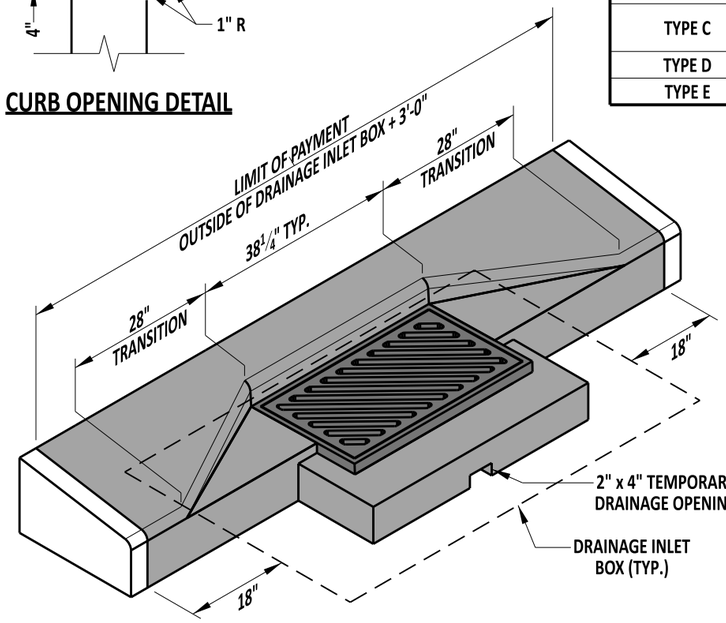

ISOMETRIC VIEW

TYPE E UNIT SHOWN

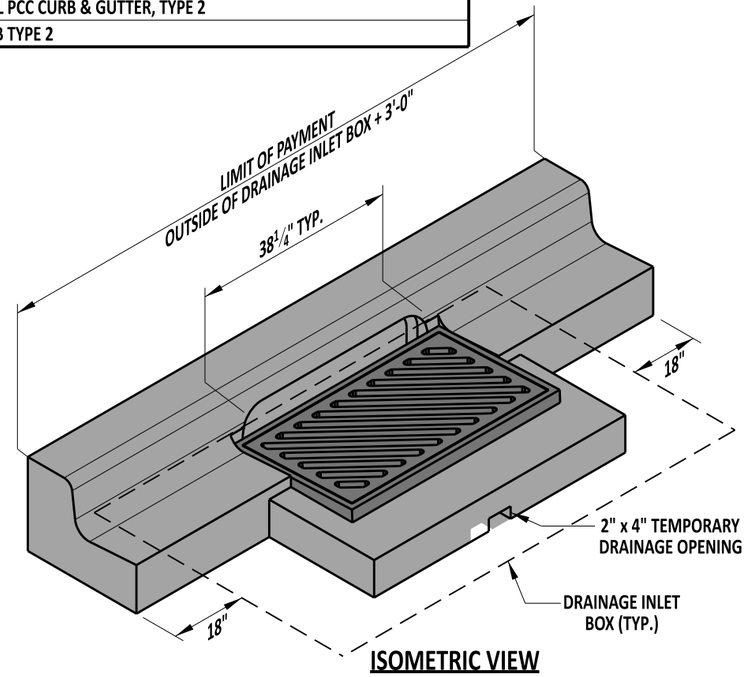

ISOMETRIC VIEW

TYPE B TOP UNIT SHOWN WITH INTEGRAL CURB & GUTTER TYPE 3

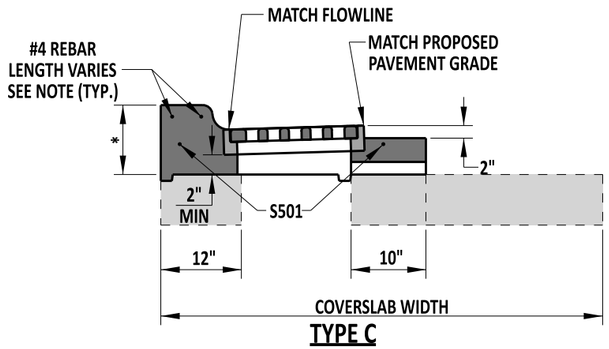

TYPE C

* - THIS DIMENSION VARIES BASED ON THE HEIGHT OF THE CURB AND GUTTER OR CURB USED:
- INTEGRAL PCC CURB AND GUTTER, TYPES 1-6 AND 3-6 & CURB, TYPE 1-6 - 12" MIN.
- INTEGRAL PCC CURB AND GUTTER, TYPES 1-4 AND 3-4 & CURB, TYPE 1-4 - 10" MIN.
- INTEGRAL PCC CURB AND GUTTER, TYPES 1-2 AND 3-2 & CURB, TYPE 1-2 - 8" MIN.

NOTE: LENGTH OF #4 REBAR SHALL BE THE OUTSIDE OF THE DRAINAGE INLET BOX PLUS 2'-9".

TYPE E TOP UNITS ARE INTENDED TO LIMIT INTRUSION INTO BIKE AND TRAVEL LANES. WHERE SUFFICIENT SHOULDER EXISTS, THE GRATE IS TO BE INSTALLED IN LINE WITH THE CURB FACE.

DelDOT

Andrew Short — ENGINEERING SUPPORT — 12/13/2022 DATE

RECOMMENDED

DRAINAGE INLET TOP UNITS

STANDARD NO. D-5 (2022) | SHT. 3 OF 9

REVIEWED — DEPUTY DIRECTOR - DESIGN — 12/16/2022 DATE

APPROVED — CHIEF ENGINEER — 12/21/2022 DATE

12/13/2022